

**NEW**



Quality and reliability is our tradition

KYORITSU

## VOLTAGE DETECTOR VOLT STICK KEW 5711

# *Non-Contact Voltage Detector with LED Light*



- Beep sound and red LED indicate AC voltage presence,
- Bright white LED light integrated into the tip
- Autocheck function for battery and internal circuit
- Dual sensitivity

### Voltage detection:

Tip glows red and buzzer sounds when voltage is detected.


The simplest way to know if voltage is present!

KYORITSU ELECTRICAL INSTRUMENTS WORKS, LTD.

<http://www.kew-ltd.co.jp>

## Always on! – No need to press button.

KEW 5711 is always ON = ready to use. This is a big safety advantage because you do not have to remember to switch it ON and it always indicates the dangerous presence of voltage.

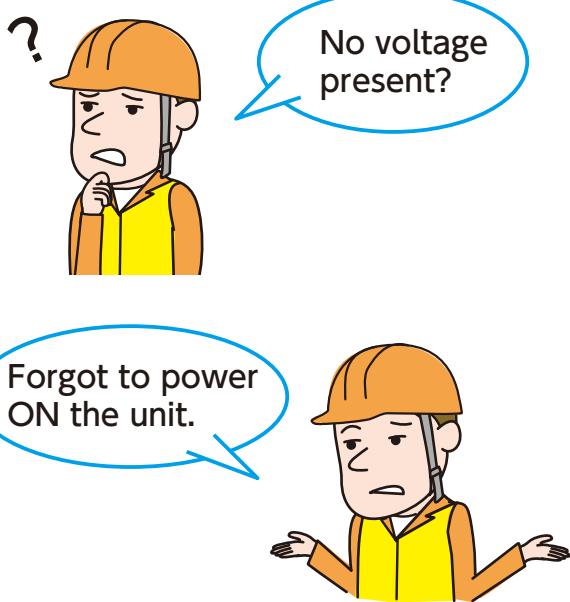

Always ON does not affect the battery duration because it uses a special low power circuit. Battery life > 1 year (standby).

\*Always check the unit on a known live source before use.

## Dual sensitivity

Lo sensitivity helps to recognise the Phase from Neutral in sockets.

High sensitivity for checking the presence of voltage from a further distance.



Detector tip

Short press: LED Light ON/ OFF

Long press: Switches sensitivity




High sensitivity may be useful for locating wires behind walls.

### KEW 5711 Specifications

Operating voltage	AC 90-1000 V (Lo sensitivity) AC 20-1000 V (Hi sensitivity)
Frequency range	50/60Hz
Operating temp. range	-10 to 50°C
Storage temp. range	-20 to 60°C
Use environment	Altitude 2000m or less, in-door use
Safety Standard	IEC 61010-1 CAT IV 600V /CAT III 1000V Pollution degree 2
Power source	R03/LR03 (AAA) (1.5V) x 2
Low battery warning	Glow tip quickly flashes in red five times.
Dimension	153(L) x Φ20mm
Weight	Approx. 40g (including batteries)
Accessories	LR03(AAA) x 2, Instruction manual

### Designed to meet IEC61010-1

The unit is designed to CAT IV 600V and CAT III 1000V and can be used in various locations safely.

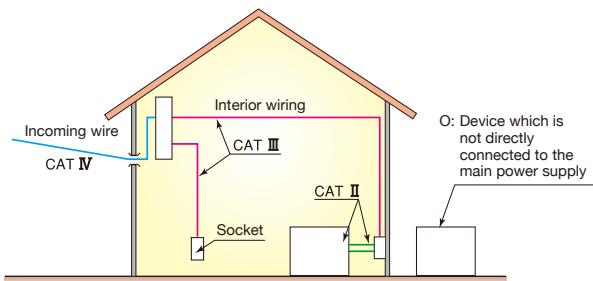

## Safety Warnings :

Please read the "Safety Warnings" in the instruction manual supplied with the instrument thoroughly and completely for correct use. Failure to follow the safety rules can cause fire, trouble, electrical shock, etc. Therefore, make sure to operate the instrument on a correct power supply and voltage rating marked on each instrument.

### For inquiries or orders :



**KYORITSU ELECTRICAL  
INSTRUMENTS  
WORKS, LTD.**

2-5-20, Nakane, Meguro-ku, Tokyo, 152-0031 Japan

Phone:+81-3-3723-0131

Fax:+81-3-3723-0152

E-mail:info-eng@kew-ltd.co.jp

<http://www.kew-ltd.co.jp>